

3D Seismic Sedimentology of Nearshore Subaqueous Fans – A Case Study from Dongying Depression, Eastern China

Yang Fengli^{1,*}, Zhao Wenfang¹, Sun Zhuan¹,
Cheng Haisheng² and Peng Yunxin³

¹*School of Ocean and Earth Science, Tongji University, Shanghai,*

²*Jiangsu Oilfield, SINOPEC, Yangzhou, Jiangsu,*

³*Chengdu University of Technology, Chengdu, Sichuan,
China*

1. Introduction

The nearshore subaqueous fan, also known as the steep bank sublacustrine fan (Zhao, 2000), or submarine fan (Catuneanu et al., 2002; Richard & Bowman, 1998; Takahiro & Makoto, 2002), is the fan-shaped sedimentary accumulation of sand–conglomerate body located in the footwall of major fault in rift basins (Zhang, J.L & Shen, 1991; Zhang, M. & Tian, 1999), and commonly composed by three sub-facies including a root sub-fan, a mid sub-fan and a marginal sub-fan. Its formation and development are controlled by basin boundary conditions, paleotopography, tectonic evolution, the nature of the provenance, paleoclimate, paleocurrent and other factors (Lu, 2008; Xie et al., 2004; Yan et al., 2005). In the Bohai Bay Basin, eastern China, a nearshore subaqueous fan system of Paleogene age is widely developed in the lower Es4 Formation in Paleogene in the northern Dongying Depression (Fig.1). Analyses found that the mid sub-fan is the main part of the fan, characterized by the pebbly sandstones, conglomerates and block sandstones in the braided channel microfacies, intra-channel microfacies and leafy sandbody microfacies (Gao et al., 2008; Song, 2004; Yan et al., 2005). Oil and gas exploration in the Dongying Depression has demonstrated that the sand–conglomerate developed in the mid sub-fan is the effective oil and gas reservoir. Due to a deep burial (>3500m), multi staged sub-fan development, and small seismic impedance differences, however, to describe and predict the distribution of the effective sand–conglomerate reservoir in the nearshore subaqueous fan is difficult. Studies have also found that conventional 3D seismic data with industry-standard and seismic acoustic impedance inversion data from ac+den loggings could not distinguish the effective sand–conglomerate reservoir from sand–conglomerate sedimentary body (Song, 2004).

Seismic sedimentology is the use of seismic data to study sedimentary rocks and processes by which they form (Zeng et al., 2001, 2004). Since its first introduction in 1998 (Zeng et al., 1998), the concept has been applied in the identification of paleorivers, the sedimentary facies and sedimentary environment evolutions of carbonate platform and the slope fans with many good results (Carter, 2003; Chen.& Meng, 2004; Crumeyrolle et al., 2007; Darmad et al., 2007; Gee & Gawthorpe, 2007; Handford & Baria, 2007; Ling et al., 2005; Lin et al.,

2007; Liu, B.G. & Liu, L.H., 2008; Nordfjord et al., 2005; Posamentier & Killa, 2003; Prather, 2003; Sullivan et al., 2007; Schwab et al., 2007; Wang et al., 2004; Wu et al., 2005; Zeng et al., 2003, 2004, 2007; Zhang et al., 2007), but rarely used to study nearshore subaqueous fans. In this paper, we took the nearshore subaqueous fan in the Dongying Depression as a case, and used the pseudo-acoustic 3D seismic inversion method on characteristic logs to reconstruct 3D seismic sedimentological structures of the nearshore subaqueous fans including the distribution of the effective sand-conglomerate reservoirs and the temporospatial evolution of individual nearshore subaqueous fan system.

Over the years, six exploratory wells were drilled into the lower Es4 Formation in the northern Dongying Depression and four of them encountered commercial oil and gas. The logging data from all six wells yield good coverage with 0.125 m or 0.25 m sampling spacing. An industry-standard 3D seismic data of 600 km² acquired in 2005 was processed using high-fidelity prestack time migration technique with 25m × 25m track spacing, 1ms sampling interval, 25Hz dominant frequency and 10-60Hz effective frequency bandwidth in the target formation.

2. Characteristics of the nearshore subaqueous fan in the northern Dongying Depression

The Dongying Depression is a typical sub-structural unit in the Bohai Bay Basin, Eastern China, surrounded by a series of uplifts, including the Luxi Massif in the south, Chenjiazhuang Uplift in the north, Qingtuozhi Uplift in the east, Binxian Uplift and Qingcheng Uplift in the west (Fig.1). As a rift basin, the Dongying Depression is

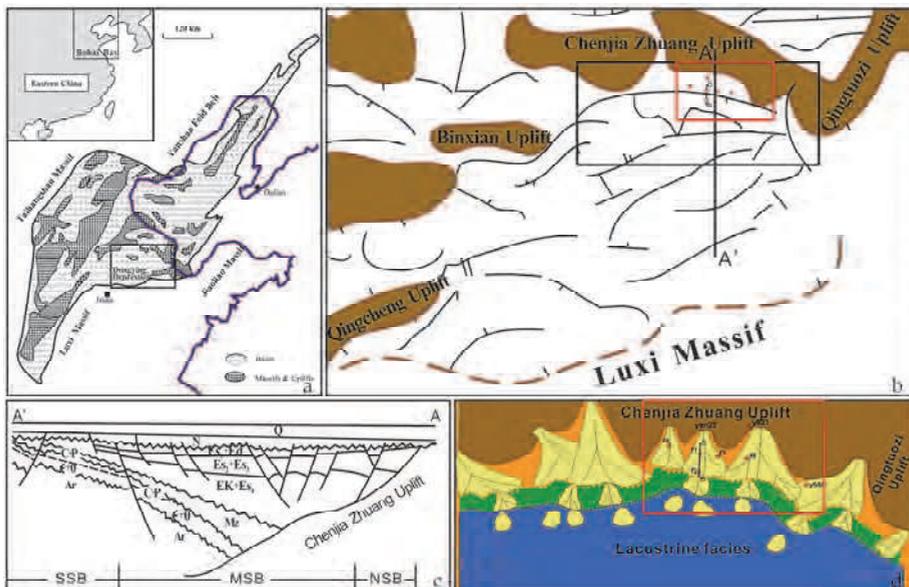


Fig. 1. Location and distribution of sedimentary facies of the lower Es4 Formation in the northern Dongying Depression, Bohai Bay Basin, Eastern China. 3D seismic area is marked by Red box.

characterized by a structural style of half-graben with a northern faulting and southward overlapping. The Depression can be divided into three structural belts: a northern steep belt (NSB), a middle sag belt (MSB) and a southern slope belt (SSB) (Fig.1c). During the lower Es4 Formation in the early Paleogene, under the controlling of the northern Chenjiazhuang boundary extensional fault, many nearshore subaqueous fans developed in the footwall of the Chenjiazhuang major fault along the northern steep belt and extending into the deep and semi-deep lacustrine facies of the middle sag belt (Fig.1d) with sources mainly from the northern Chenjiazhuang Uplift (Gao et al., 2008; Xie et al., 2004; Yan et al., 2005) (Fig. 1). The burial depth of these subaqueous fans now reaches more than 3500m.

Facies analyses shows that the Dongying nearshore subaqueous fan consists of three sub-facies including a root sub-fan, a mid sub -fan and a marginal sub -fan (Gao et al., 2008; Song, 2004; Yan et al., 2005). The root sub-fan is composed by one or more major channel

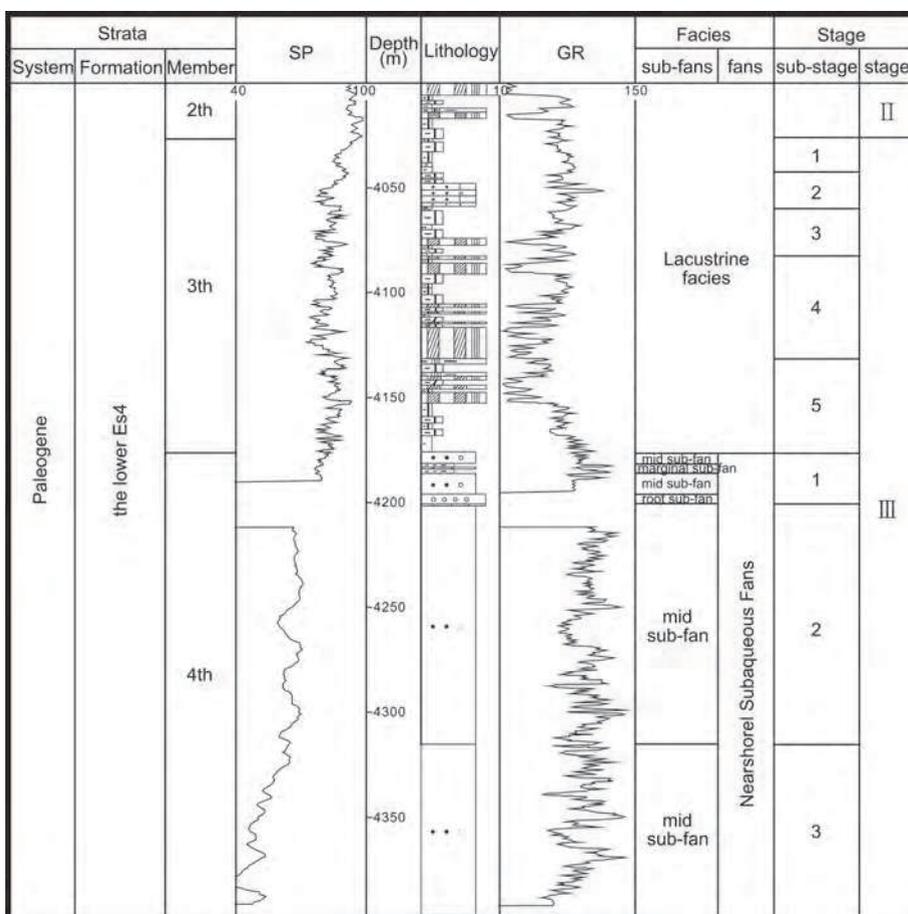


Fig. 2. The single-well facies analysis of well f8 shows that the 4th member of the lower Es4 Formation is a nearshore subaqueous fans with three sub-facies (modified from Gao et al., 2008; Song, 2004; Yan et al., 2005).

sediments and the main lithology includes gray matrix-supported conglomerates, sandy conglomerates and black shales. The mid sub-fan, which is the main part of the nearshore subaqueous fan and forms the effective reservoir in the study area, is characterized by braided channels with braided channel microfacies, intra-channel microfacies and leafy sandbody microfacies. The main lithology of the mid sub-fan includes pebbly sandstones, conglomerate and block sandstones, with thickness varying between 1 and 55 m. The marginal sub-fan consists of siltstones, muddy siltstones and mudstone interbedding rocks (Fig.2). According to well stratigraphic cyclicities and 3D seismic reflection features, the lower Es4 Formation can be divided further into 5 members, standing for 5 individual nearshore subaqueous fans with several sub-facies (Fig. 2).

In general, 3D seismic reflection profiles of the nearshore subaqueous fan are characterized by wedge-shaped, mound-shaped or lenticular-shaped systems, and sub-fans can be further identified. On the synthetic seismograms record calibration, the root sub-fan is characterized by weak reflection, non-reflection or chaotic reflection, the mid sub-fan is characterized by weak to moderate intensity amplitudes, sub-parallel, weak continuous reflection, and the marginal sub-fan is characterized by continuous medium frequency, moderate to low intensity amplitudes. The deep lacustrine facies in the sag belt is characterized by either weak reflection or non-reflection. However, to identify the sub-facies of the nearshore subaqueous fan using the 3D seismic section is difficult (Fig.3).

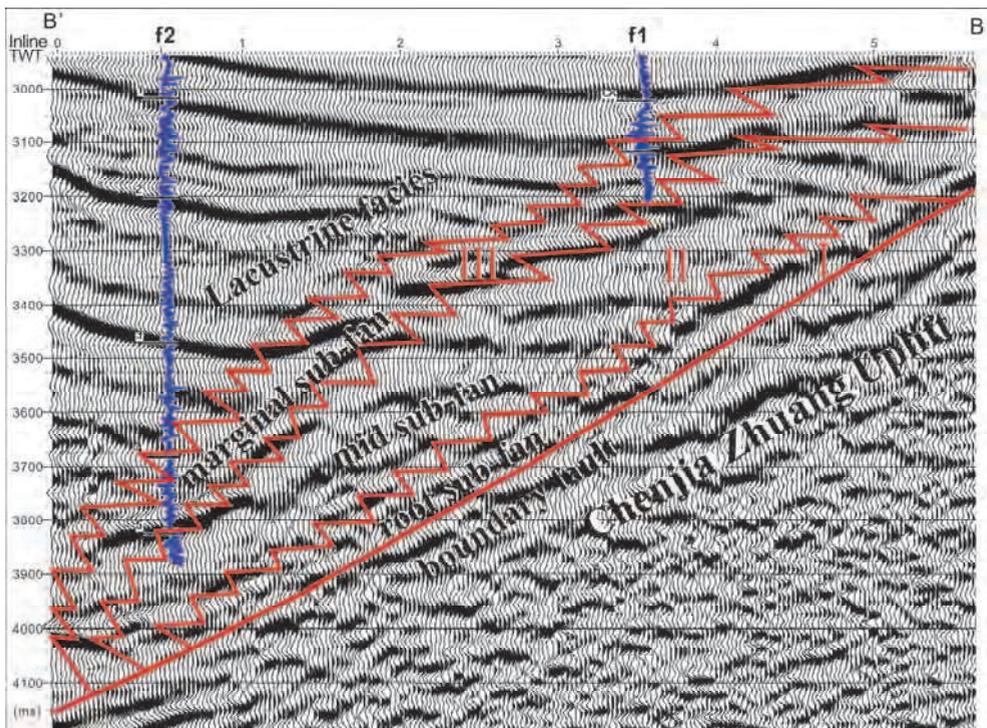


Fig. 3. 3D seismic reflection characteristics of the nearshore subaqueous fans along line B'B (see Line location in Fig.1)

3. The pseudo-acoustic 3D seismic inversion based on Logs reconstruction

3.1 Methodology

The pseudo-acoustic 3D seismic inversion method different from the conventional 3D seismic impedance inversion method not only in working through logs reconstruction, inversion, interpolation and extrapolation, but also adding or replacing characteristic curves to the density logs or, more commonly, velocity logs in order to achieve the ability to identify the reservoir from the surrounding rock in the case of small impedance difference (Shen & Yang, 2006; Zhang et al., 2005). The potential reservoir may show no direct relationship with the seismic reflection but can be distinguished from different lithological changes.

The velocity and the time-depth relationship after logs reconstruction may change so deviations between seismic reflection horizon and synthetic seismogram calibration's horizon should be established to reflect these changes (Luo et al., 2006). The pseudo-acoustic seismic inversion results based on logs reconstruction may be not accurately reveals the corresponding lithological changes of the target layers. To solve this problem, the zero Mean-Based logs reconstruction techniques, which keeps the original time-depth relationship unchanged, can be applied. The principle is to set the characteristic curves or logs involved in seismic inversion to a mean of 0, that is $\sum A_i = 0$ (A_i is characteristic curve sample values of target layers). Adding or subtracting the normalized curve and acoustic characteristics curve, then properly magnifying the normalized characteristics curve in order to highlight lithology information. This process can be expressed as:

pseudo-acoustic curve = acoustic logs \pm characteristic curves $\times K$,

while K stands for the curve amplification factor.

As the characteristic curves keep the information of the target layer, and the velocity curves of the upper and lower target layers are kept unchanged, so the original time-depth relationship will remaine unchange (Luo et al., 2006).

The implementation process of this method includes the following: ①selection of the characteristic curves; ②standardization of the characteristic curves; ③normalization and reconstruction of the pseudo-acoustic curve; ④seismic wavelet extraction and the establishment of the initial model; ⑤ pseudo-acoustic seismic inversion.

3.2 The pseudo-acoustic 3D seismic inversion based on logs reconstruction

1. Selection of the characteristic curves

To select the characteristic curves of the target layers, quantitative and semi-quantitative correlations through statistical analysis are established between different lithologies (such as the conglomerate in the fan-root, sand-conglomerate in the mid-fan, mudstone, gypsum-salt rock in the marginal-fan), effective reservoir (such as gas sand-conglomerate in the mid-fan), logs (such as acoustic time (ac), natural gamma (gr), neutron porosity (cnl), spontaneous potential (sp), and logging parameters that correspond to different lithology types in different fans.

The results show that single logs parameter cannot identify the different lithologies in different fans, but combinations of any two of logging parameters (ac, gr or sp) can effectively indentify them to some extent. Further analysis also show that any two logs parameter's combinations between ac, gr, and sp could distinguish the effective and ineffective sand -conglomerate reservoir with a thicknesses greater than 6 m (Fig.4). Therefore, we can use any two logs combination between ac, gr, and sp as the characteristic curves.

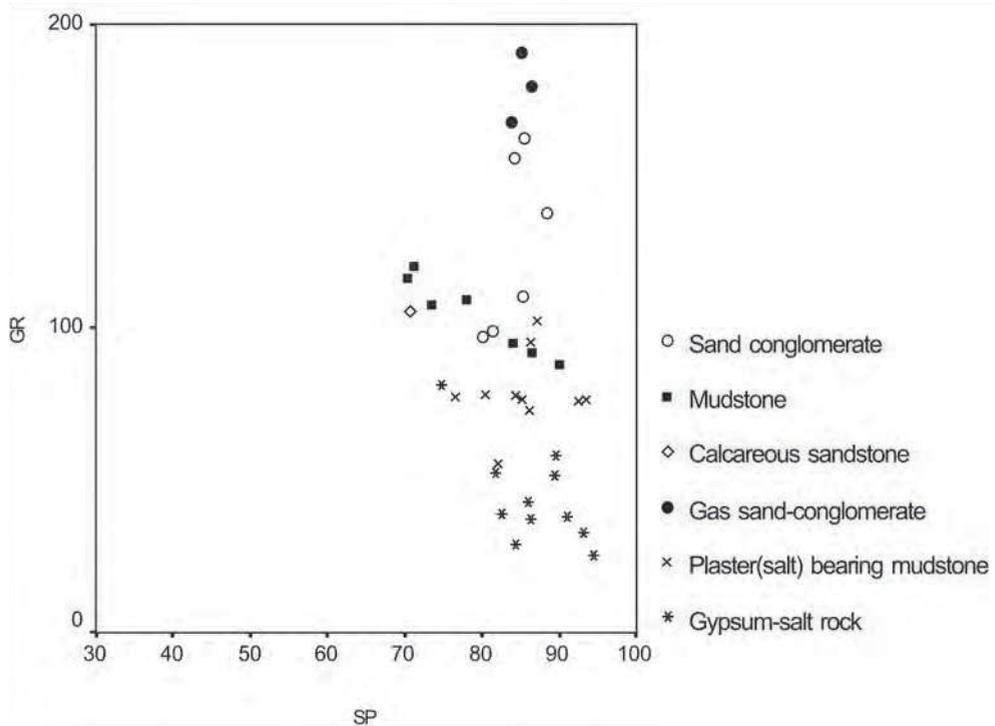


Fig. 4. Statistical analysis between the different lithology, logging parameters of gr and sp and effective reservoir with a thicknesses of > 6 m in wells f1,f2,f3,f8.

2. The standardization of the characteristic curve

In order to eliminate the systematic error caused by different measuring apparatuses and time, the characteristic curves need to be standardized by depth correction, environment correction, mudstone baseline correction, outliers removal, wave filtering and so on.

3. Normalization and the creation of the pseudo-acoustic curve

In order to avoid the systematic error caused by differences in dimension and value range, the characteristic curves need to be normalized before creating the pseudo-acoustic curve. Firstly, the natural gamma (gr) and spontaneous potential (sp) logs will be normalized by regulating the numerical range to the [0 ,1] ,and conducting the [0 ,100] amplification process before summing them for a GS (gr+sp) curve. Then, the asonic logging curve (ac) is processed for the treatment filter values that exceed 100 in order to remain the low-frequency information and eliminate high-frequency information of ac. Finally, the pseudo-acoustic curve GS is obtained by adding the characteristic curve (GS) to the filtered ac. It is clear that the pseudo-acoustic curve GS contain not only the high frequency information of both gr and sp, but also the low frequency information of ac, thus the ability to identify lithologies and strata is greatly improved.

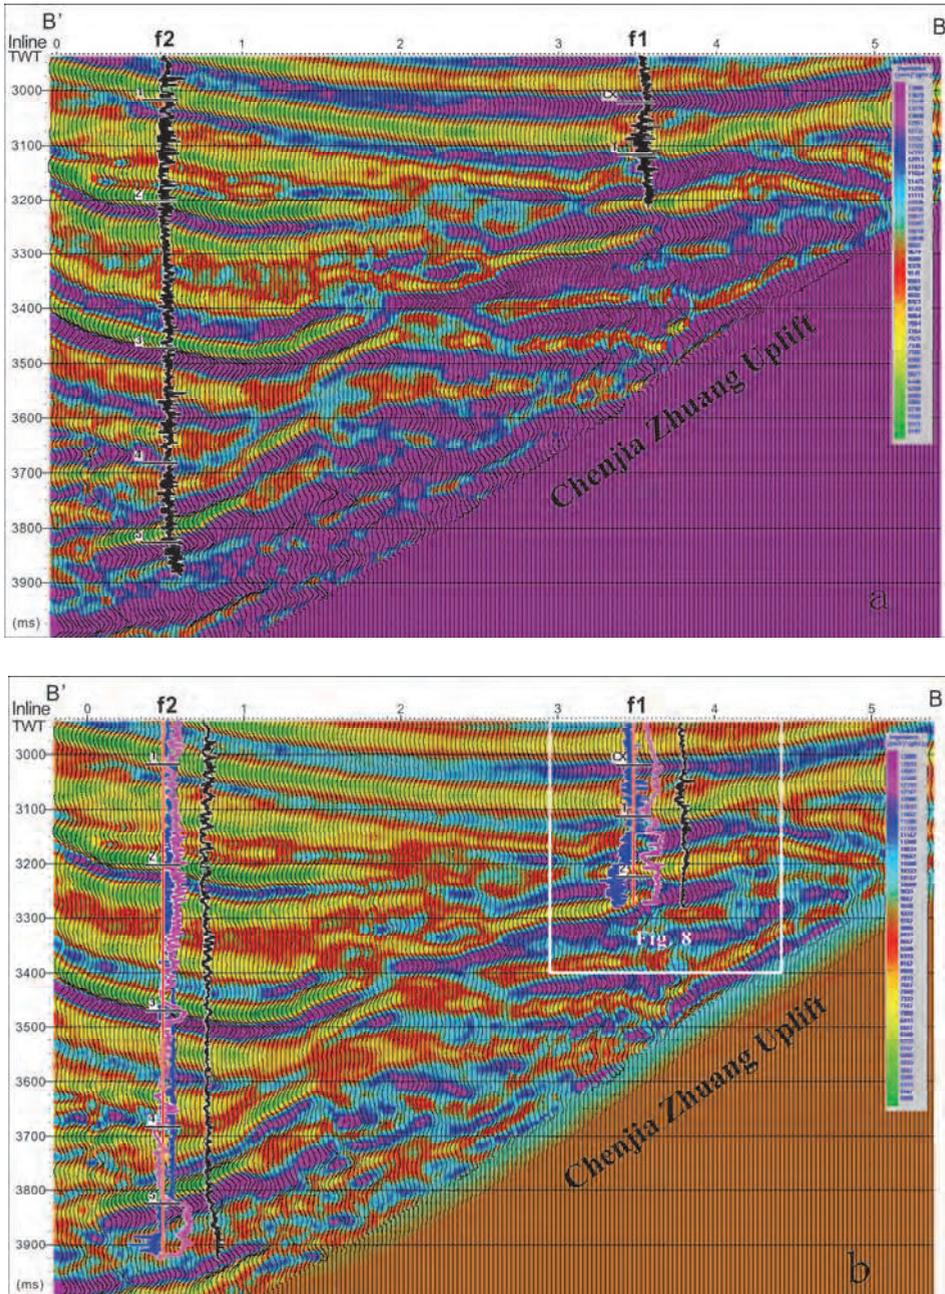


Fig. 5. Comparison between results using different 3D seismic inversion parameters.
a. Conventional 3D seismic inversion data using ac+den loggings; b. Pseudo-acoustic (GS)
3D seismic inversion data based on gr + sp Logs reconstruction

4. Seismic wavelet extraction and initial model creation

Establishing a reasonable initial geological model is the key for getting a good pseudo-acoustic seismic inversion. In fact it is a process of deciphering interpolation and extrapolation of well data under the constraints of the geological concept; the quality of the seismic inversion results are largely dependant on the initial model, which is decided by previous geological knowledge. In order to acquire a good model of impedance inversion, we not only replace the sonic logging curve (ac) by the GS logging curve and by extract Ricker wavelet from the target layer, but also combine the available well information based on the synthetic seismograms calibration and test runs repeatedly.

5. Pseudo-acoustic 3D seismic inversion

On the Strata5.2 inversion software platform, the GS, the GS pseudo-acoustic 3D seismic inversion data are obtained by calculation after importing the GS. The results show that 3D seismic inversion data based on gr+sp logs reconstruction is better than the conventional 3D seismic inversion using ac+den loggings to distinguish the internal structure of the nearshore subaqueous fans (Figs. 5, 6)

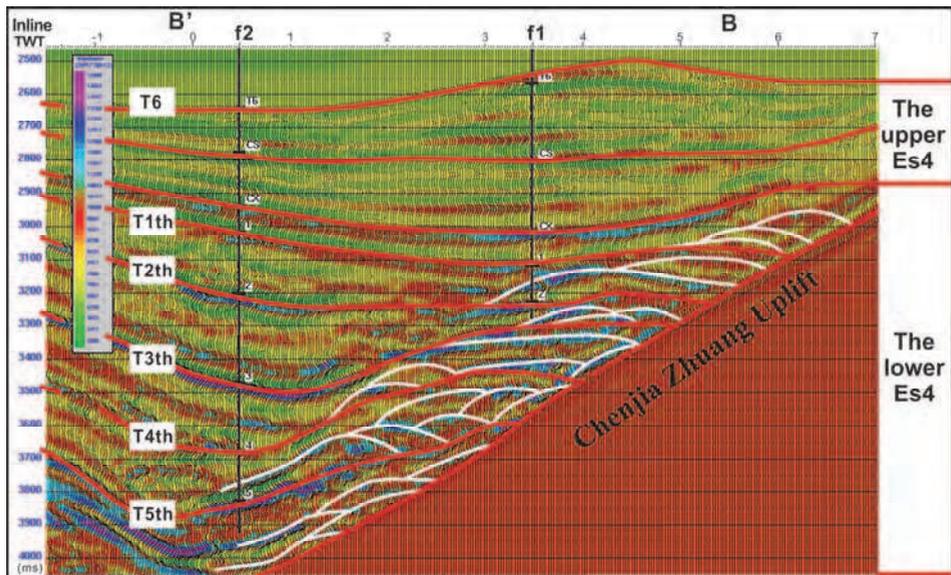


Fig. 6. 3D seismic reflection characteristics of the internal structure in the nearshore subaqueous fans based on GS 3D seismic inversion data along line B'B (see Line L location in Fig.1)

4. 3D seismic sedimentology analysis of nearshore subaqueous fans

4.1 Evolution characteristics of seismic palaeogeomorphology of nearshore subaqueous fans

By using the GS pseudo-acoustic 3D seismic inversion data coupled with calibration of the synthetic seismograms, the internal sub-facies in each member of the lower Es4 Formation can be identified and the temporospatial evolution of the nearshore subaqueous fans can be extrapolated (Fig.6). The analysis finds that each member of the lower Es4 generally consists

of 2-5 sub-facies (Fig.6). The time for high frequent sub-facies development is during deposition of the 4th member of the lower Es4 Formation, which includes at least 5 sub-facies. Fig.7 shows the instantaneous frequency level slices of sub-layers' bottom boundary of the lower Es4 Formation as characterized by a low frequency in the main channel in the fan-root, a middle-low frequency in the mid-fan and a high frequency in the marginal-fan. These results clearly reveal the paleogeographic characteristics and different temporospatial evolution stages of sub-facies in the nearshore subaqueous fan system.

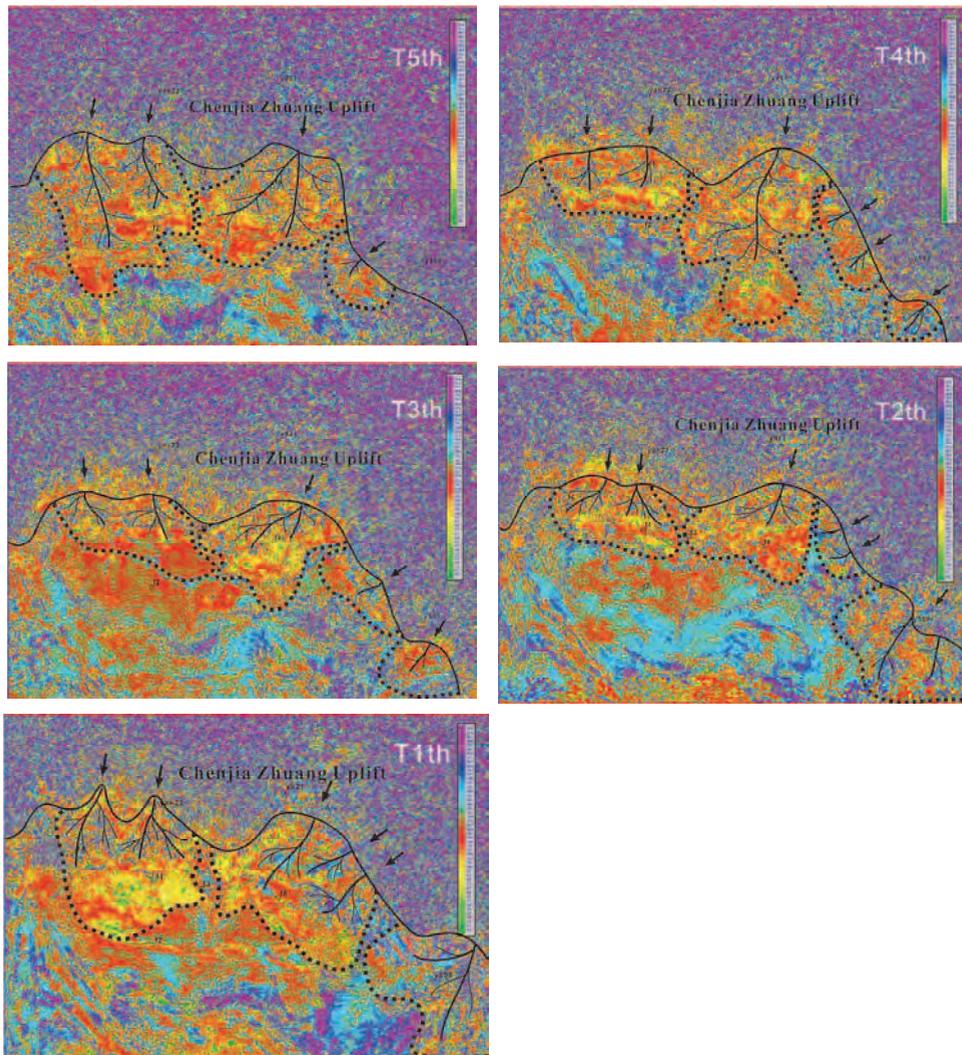


Fig. 7. The instantaneous frequency level slices of sub-layers' bottom boundary of the lower Es4 Formation reflect the paleogeographic characteristics and space-time evolution of different sub-layers

4.2 The distribution characteristics of effective reservoir in nearshore subaqueous fan

The synthetic seismogram calibration results show significantly higher dimension values of 12000-15500 in the GS pseudo-acoustic 3D seismic inversion for the effective sand-conglomerate reservoir but lower dimension values <12,000 for the ineffective reservoir in the lower Es₄ Formation (Fig.8). Accordingly, quantifying the thickness and the distribution of the effective sand-conglomerate reservoir in the lower Es₄ Formation can be relatively easy (Fig.8).

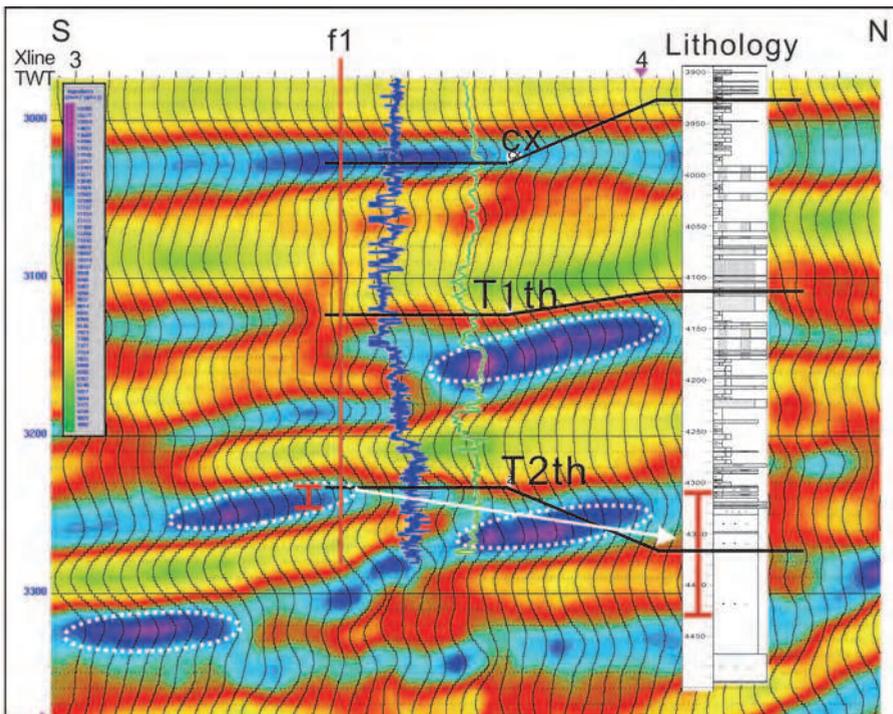


Fig. 8. The effective reservoirs range of values in the GS 3D seismic inversion data for the blue zone (see location in Fig.5b)

5. Conclusions

1. Nearshore subaqueous fans of Paleogene age are well developed in the lower Es₄ Formation of the Dongying Depression, in the Bohai Bay Basin, eastern China. Research and oil and gas exploration in the northern Dongying Depression have demonstrated that the sand-conglomerate in the mid sub-fan is not only the main part of the nearshore subaqueous fan, but also the effective oil and gas reservoir in the region.
2. Statistical analyses on different lithology and effective reservoir and logging parameters show that the acoustic (ac), natural gamma (gr), spontaneous potential (sp) can be used as characteristic curves for seismic inversion calculation. Any combinations of two logs can distinguish the effective from the ineffective sand-conglomerate reservoirs with a thicknesses greater than 6 m.

3. Compared with the conventional 3D seismic inversion, the pseudo-acoustic 3D seismic inversion based on characteristic logs reconstruction greatly improves the ability to identify internal seismic sub-facies. Several internal sub-facies in each member of the nearshore subaqueous fan in the lower Es4 Formation have been identified.
4. The pseudo-acoustic 3D seismic inversion technique based on logs reconstruction reveals the 3D seismic sedimentological characteristics of nearshore subaqueous fans including the internal sub-facies structure and various temporospatial evolution stages in different sub-facies. The distribution of the effective sand-conglomerate reservoirs can be better quantified by using this method than the conventional 3D seismic impedance inversion.


6. References

- Carter, D. (2003). 3-D seismic geomorphology: Insights into fluvial reservoir deposition and performance, Widuri field, Java Sea. *AAPG Bulletin*, Vol.87, No.6, (June 2003), pp.909-934, ISSN 0149-1423
- Catuneanu, O.; Hancox, P. & Cairncross B. et al.. (2002). Foredeep submarine fans and forebulge deltas : orogenic off-loading in the underfilled Karoo Basin. *Journal of African Earth Sciences*, Vol.35, No.4, (November 2002), pp.489-502, ISSN 0899-5362
- Chen, S.T. & Meng, X.L. (2004). A method for prediction of reservoirs of thin interbedded layers (in Chinese). *Geophysical Prospecting for Petroleum*, Vol.43, No.1, (January 2004), pp.33-36, ISSN 1000-1441
- Chen, P. (2006). Sand reservoir prediction of steep slope zone in Biyang Sag (in Chinese with English abstract). *Petroleum Exploration and Development*, Vol.33, No.2, (April 2004), pp.198-200, ISSN 1000-0747
- Darmad, Y.; Willis, B. & Dorobek, S. (2007). Three-dimensional seismic architecture of fluvial sequences on the low-gradient sunda shelf offshore Indonesia. *Journal of Sedimentary Research*, Vol.77, No.3, (March 2007), pp.225-238, ISSN 1527-1404
- Gao, X.C.; Zhong, J.H. & Lei, M. et al. (2008). Sedimentary characteristics and controlling factors of the deep glutenite fans in the northern steep slope. Dongying sag-taking Well Fengshen-1 area as example (in Chinese). *Petroleum Geology and Engineering*, Vol.22, No.1, (January 2008), pp.5-8, ISSN 1673-8217
- Gee, M. & Gawthorpe, R. (2007). Early evolution of submarine channels offshore Angola revealed by three-dimensional seismic data, In: *Seismic Geomorphology: Applications to Hydrocarbon Exploration and Production*. Davies, R.J. Davies.; H.W. Posamentier.; L.J. Wood. & J.A. Cartwright, (Ed.), pp.223-235, Special Publications, ISBN 978-1-86239-223-6, London
- Handford, C. & Baria, L. (2007). Geometry and seismic geomorphology of carbonate shoreface clinoforms Jurassic Smackover Formation, north Louisiana, In: *Seismic Geomorphology: Applications to Hydrocarbon Exploration and Production*, Geological Society, R.J. Davies.; H.W. Posamentier.; L.J. Wood. & J.A. Cartwright, (Ed.), pp.171-185, Special Publications, ISSN 978-1-86239-223-6, London
- Li, T.H.; Liang, H.L. & Hu, Y.J. et al. (2005). A research of nearshore subaqueous fans in Guanjiapu beach area and its exploration meaning (in Chinese). *Oil Geophysical Prospecting*, Vol.40, No.5, (October 2005), pp.561-564, ISSN 1000-7210
- Lin, J.X.; Shi, Z.J. & Ling, Y. et al. (2007). A study of depositional environment evolution of the target zone through basic seismic attributes analysis (in Chinese with English

- abstract). *Journal of Chengdu University of Technology(Science & Technology Edition)*, Vol.34, No.2, (April 2007), pp.174-179, ISSN 1671-9727
- Ling, Y.; Sun, D.S. & Gao, J. (2005). Interpretation of depositional bodies in the parasequence sets from 3-D seismic data (in Chinese). *Geophysical Prospecting for Petroleum*, Vol.44, No.6, (November 2005), pp.568-577, ISSN 1000-1441
- Liu, B.G. & Liu, L.H. (2008). Application of applied seismic sedimentology in sedimentary facies analysis (in Chinese). *Geophysical Prospecting for Petroleum*, Vol.47, No.3, (May 2008), pp.266-271, ISSN 1000-1441
- Lu, Z.Y. (2008). Influence of the Paleogene structural styles on deposition and reservoir in Chezhen Sag, Bohai Bay Basin (in Chinese with English abstract). *Journal of Palaeogeography*, Vol.10, No.3, (June 2008), pp.277-285, ISSN 1671-1505
- Luo, Q.S.; Zhao, M. & Zhang X.J. (2006). Application of Zero Mean-Based Curve Reconstruction to Seismic Inversion (in Chinese with English abstract). *Xinjiang petroleum geology*, Vol.27, No.4, (August 2006), pp.478-480, ISSN 1011-3873
- Nordfjord, S.; Goff, J; Jr, J. & Sommerfield, C. (2005). Seismic geomorphology of buried channel systems on the New Jersey outer shelf: assessing past environmental conditions. *Marine Geology*, Vol.214, No.4, (February 2005), pp.339-364., ISSN 0025-3227
- Posamentier, H. & Kolla, V. (2003). Seismic geomorphology and stratigraphy of depositional elements in deep-water settings. *Journal of Sedimentary Reserch*, Vol.73, No.3, (May 2003), pp. 367-388, ISSN 1527-1404
- Prather, B. (2003). Controls on reservoir distribution, architecture and stratigraphic trapping in slope settings. *Marine and Petroleum Geology*, Vol..20, No.6-8, (June-September 2003), pp.529-545, ISSN 0264-8172
- Richard, M. & Bowman, M. (1998). Submarine fans and related depositional II: variability in reservoir architecture and wireline log character. *Marine and Petroleum Geology*, Vol.15, No.8, (December 1998), pp.821-839, ISSN 0264-8172
- Schwab, A.; Tremblay, S. & Hurst, A. (2007). Seismic expression of turbidity- current and bottom-current processes on the Northern Mauritanian continental slope, In: *Seismic Geomorphology: Applications to Hydrocarbon Exploration and Production*, Geological Society, R.J. Davies.; H.W. Posamentier.; L.J. Wood. & J.A. Cartwright, (Ed.), pp.237-252, Special Publications, ISBN 978-1-86239-223-6, London
- Shen, X.C. & Yang, J.F. (2006). The Application of the Reconstructed Characteristic Curve of Reservoir in the Inversion (in Chinese with English abstract). *West China Petroleum Geosciences*, Vol..2, No.4, (December 2006), pp.436-439, ISSN 5021-5850
- Song, N. (2004). The study of stratigraphic sequence with gravel rock in northern steep of the Dongying sag stratigraphic research study (in Chinese with English abstract). *Ph.D. Thesis*, nanjing university, Nanjing
- Song, R.C.; Zhang, S.N. & Dong, S.Y. et al. (2007). Characteristics and Controlling Factors Analyze of Nearshore Subaqueous Fans in Langgu Depression (in Chinese with English abstract). *Journal of Earth Sciences and Environment*, Vol.2, No.29, (June 2007), pp.145-158, ISSN 1672-6561
- Sullivan, E.; Marfurt, K.; Blumentritt, C. & Ammerman, M. (2007). Seismic geomorphology of Paleozoic collapse features in the Fort Worth Basin (USA), In: *Applications to Hydrocarbon Exploration and Production*, Geological Society, R.J. Davies.; H.W.

- Posamentier, L.J. Wood, & J.A. Cartwright, (Ed.), pp. 171-185, Special Publications, ISBN 978-1-86239-223-6, London
- Takahiro, S. & Makoto, I. (2002). Deposition of sheet-like turbidite packets and migration of channel- overbank systems on a sandy submarine fan: an example from the Late Miocene-Early Pliocene Forearc Basin, Boso Peninsula Japan. *Sedimentary Geology*, Vol.149, No.4, (June 2002), pp.265-277, ISSN 0037-0738
- Tian, J.C. & Fu, D.J. (2001). A research on the reservoir property of the sand-conglomerate in the nearshore submerged fan taking the third member of the Shahejie Formation in Well C913 and C916 area on the northern zone of the Zhanhua Depression as example (in Chinese with English abstract). *Journal of Chengde University of Technology*, Vol.28, No.4, (October 2010), pp.762-766, ISSN 1005-9539
- Wang, L.W.; Liang, C.X. & Zou, C.N. et al. (2004). Application of comprehensive seismic data interpretation in reservoir prediction in the south part of Songliao basin (in Chinese with English abstract). *Progress in Exploration Geophysics*, Vol.27, No.1, (February 2004), pp.58-62, ISSN 1671-8585
- Wu, Y.Y.; Song, Y. & Jia, C.Z. et al. (2005). Sedimentary features in a sequence stratigraphic framework in the north area of Qaidam Basin (in Chinese with English abstract). *Earth Science Frontiers*, Vol.12, No.3, (September 2005), pp.195-203. ISSN 1005-2321
- Xie, R.J.; Qi, J.F. & Yang, Q. (2004). Structural Characteristics and Its Control to Deposition in the North of Dongying Depression (in Chinese). *Journal of Jiangnan Petroleum Institute*, Vol.26, No.1, (March 2004), pp.17-19, ISSN 1000-9752
- Yan, J.H.; Chen, S.Y. & Jiang, Z.X. (2005). Sedimentary characteristics of nearshore subaqueous fans in steep slope of Dongying depression (in Chinese with English abstract). *Journal of the University of Petroleum*, Vol.29, No.1, (February 2005), pp. 12-21, ISSN 1000-5870
- Zhang, J.L. & Shen, F. (1991). Characteristics of nearshore subaqueous fan reservoir in damoguaihe formation, Wuerxun Depression (in Chinese with English abstract). *Acta Petrolei Sinica*, Vol.12, No.3, (July 1991), pp.25-35, ISSN 0253-2697
- Zhao, J.Q.; Ji, Y.L. & Xia, B. et al. (2005). High-Resolution Sequence Research on Nearshore Subaqueous Fan System (in Chinese with English abstract). *Acta Sedimentologica Sinica*, Vol.23, No.3, (September 2005) pp.490-497, ISSN 1000-0550
- Zhang, M. & Tian, J.C. (1999). The nomenclature, sedimentary characteristics and reservoir potential of nearshore subaqueous fans (in Chinese with English abstract). *Sedimentary Facies and Palaeogeography*, Vol.19, No.4, (April 1999), pp.42-52, ISSN 1001-7824
- Zhang, X.F.; Dong, Y.C. & Shen, G.Q. (2005). Application of log rebuilding technique in constrain inversion (in Chinese with English abstract). *Petroleum Exploration and Development*, Vol.32, No.3, (June 2005) pp.70-72, ISSN 1000-0747
- Zhang, Y.H.; Yang, D.Q. & Sun, Y.H. et al. (2007). Application of high-resolution sequence stratigraphy in subtle oil pool prediction (in Chinese). *Geophysical Prospecting for Petroleum*, Vol.46, No.4, (July 2007), pp.378-383, ISSN 1000-1441
- Zeng, H.L.; Backusz, M.; Barrow, K. & Tyler, N. (1998). Stratal slicing, Part I: Realistic 3-D seismic model. *Geophysics*, Vol.63, No.2, (April 1998), pp.502-513, ISSN 0016-8003
- Zeng, H.L. & Ambrose, W. (2001). Seismic sedimentology and regional depositional systems in Miocene Norte. Lake Maracaibo, Venezuela. *The Leading Edge*, Vol.20, No.9, (November 2001), pp.1260-1269, ISSN 1070-485x

- Zeng, H.L. & Kerans, C. (2003). Seismic frequency control on carbonate seismic stratigraphy: A case study of the Kingdom Abo sequence, west Texas. *AAPG Bulletin*, Vol.87, No.2 (February 2003), pp.273-293, ISSN 0149-1423
- Zeng, H.L. & Hentz, T. (2004). High-frequency sequence stratigraphy from seismic sedimentology: Applied to Miocene, Vermilion Block 50, Tiger shoal area, offshore Louisiana. *AAPG Bulletin*, Vol.88, No.2, (February 2004), pp.153-174, ISSN 0149-1423
- Zeng, H.L.; Loucks, R. & Frank B. (2007). Mapping sediment- dispersal patterns and associated systems tracts in fourth- and fifth-order sequences using seismic sedimentology: Example from Corpus Christi Bay, Texas. *AAPG Bulletin*, Vol.91, No.7, (July 2007), pp.981-1003, ISSN 0149-1423
- Zhao, C.L. (2000). *Sedimentation-reservoir geologic essays* (in Chinese), Petroleum Industry Press, ISBN 7-5021-3006-3, Beijing, China
- Zhang, R.H.; Yu, S.Y. & Wu J.H. (1997). The effect of sediments supply condition on sequence stratigraphy analysis in continental lacustrine basins (in Chinese with English abstract). *Earth Science-journal of China University of Geosciences*, Vol. 22, No.2, (March 1997), pp.139-144, ISSN 1000-2383

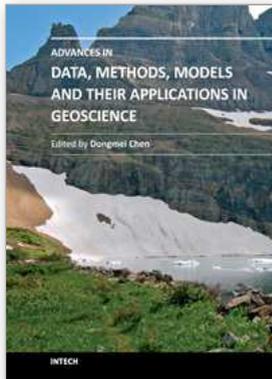

Advances in Data, Methods, Models and Their Applications in Geoscience

Edited by Dr. DongMei Chen

ISBN 978-953-307-737-6

Hard cover, 336 pages

Publisher InTech

Published online 22, December, 2011

Published in print edition December, 2011

With growing attention on global environmental and climate change, geoscience has experienced rapid change and development in the last three decades. Many new data, methods and modeling techniques have been developed and applied in various aspects of geoscience. The chapters collected in this book present an excellent profile of the current state of various data, analysis methods and modeling techniques, and demonstrate their applications from hydrology, geology and paleogeomorphology, to geophysics, environmental and climate change. The wide range methods and techniques covered in the book include information systems and technology, global position system (GPS), digital sediment core image analysis, fuzzy set theory for hydrology, spatial interpolation, spectral analysis of geophysical data, GIS-based hydrological models, high resolution geological models, 3D sedimentology, change detection from remote sensing, etc. Besides two comprehensive review articles, most chapters focus on in-depth studies of a particular method or technique.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Yang Fengli, Zhao Wenfang, Sun Zhuan, Cheng Haisheng and Peng Yunxin (2011). 3D Seismic Sedimentology of Nearshore Subaqueous Fans – A Case Study from Dongying Depression, Eastern China, *Advances in Data, Methods, Models and Their Applications in Geoscience*, Dr. DongMei Chen (Ed.), ISBN: 978-953-307-737-6, InTech, Available from: <http://www.intechopen.com/books/advances-in-data-methods-models-and-their-applications-in-geoscience/3d-seismic-sedimentology-of-nearshore-subaqueous-fans-a-case-study-from-dongying-depression-eastern->

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This is an open access article distributed under the terms of the [Creative Commons Attribution 3.0 License](#), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.