

Attitude Compensation of Space Robots for Capturing Operation

Panfeng Huang¹, and Yangsheng Xu²

1 College of Astronautics

Northwestern Polytechnical University

Xi'an, China

2 Department of Automation and Computer-Aided Engineering

The Chinese University of Hong Kong

Hong Kong, China

1. Introduction

Unlike ground-base robot manipulator, the space manipulator has no fixed base. The dynamic reaction forces and moments due to the manipulator motion will disturb the space base, especially, when the space robot is in free-floating situation, The longer the motion time of space manipulator is, the greater the disturbance to the base will be. Hence, it is essential to resolve the attitude balance problem of a space robot during the manipulator operation. The position disturbance of the base may not be an issue. The attitude change, however, is more serious because the solar panel and tele-command from the ground station should keep their life lines. On the other hand, the attitude changes possibly cause the serious collision between the manipulator hand and the target. Therefore, the attitude balance problem of free floating space robot is a challenge problem about the application of space robot in space operation.

Nowadays, space robots are aiding to construct and maintain the International Space Station (ISS) and servicing the space telescope. Therefore, space robotic servicing for satellite such as rescue, repair, refuelling and maintenance, promising to extend satellite life and reduce costs, made it one of the most attractive areas of developing space technology. Space robots are likely to play more and more important roles in satellite service mission and space construction mission in the future. A well known space robot, the Shuttle Remote Manipulator System (SRMS or "Canadarm") (D. Zimpfer and P. Spehar, 1996) was operated to assist capture and berth the satellite from the shuttle by the astronaut. NASA missions STS-61, STS-82, and STS-103 repaired the Hubble Space Telescope by astronauts with the help of SRMS. Engineering Test Satellite VII (ETS-VII) from NASDA of Japan demonstrated the space manipulator to capture a cooperative satellite whose attitude is stabilized during the demonstration via tele-operation from the ground base control station (I. Kawano, et al. 1998), (Oda, M.1999), (Oda, M., 2000), (Noriyasu Inaba, et al, 2000). The space robotic technologies mentioned above demonstrated the usefulness of space robot for space service. During the ETS-VII operation, the engineers considered the coordinated

control of the manipulator and space base in order to compensate the reaction forces and moments. Obviously, compensating the attitude disturbance of space base will consume much fuel during the motion, at the same time, the fuel is very limit and not reproduced. The life of space robot will be reduced by a long way. Therefore, the coordinated control of manipulator and space base is not the best method to control the space robot.

There are many studies on dynamic interaction of space base and its manipulators. Dubowsky and Torres (Steven Dubowsky, Miguel A. Torres, 1991) proposed a method called the Enhanced Disturbance Map to plan the space manipulator motions so that the disturbance to the space base is relatively minimized. Their technique also aided to understand the complex problem and developed the algorithm to reduce the disturbance. Evangelos G. Papadopoulos (Evangelos G. Papadopoulos, 1992) exhibited the nonholonomic behavior of free-floating space manipulator by planning the path of space manipulator. They proposed a path planning method in Cartesian space to avoid dynamically singular configurations. Yoshida and Hashizume (K.Yoshida, et, al, 2001) utilized the ETS-VII as an example to address a new concept called Zero Reaction Maneuver (ZRM) that is proven particularly useful to remove the velocity limit of manipulation due to the reaction constraint and the time loss due to wait for the attitude recovery. Moreover, they found that the existence of ZRM is very limited for a 6 DOF manipulator, besides the kinematically redundant arm. However, the redundant manipulator gives rise to the computational cost and complicated kinematics problems. Hence, it is not best way to use the redundant manipulator from the view of engineering point.

Nearly all examples mentioned above almost focused on the nature characteristics of the space robot with a single robot arm. Moreover, these previous research largely limited the application of manipulator so that the space manipulator can not do desired mission like as ground-base manipulator. Thus, the space manipulator's motion must follow the constrained path in order to minimize the disturbance to the space base. Therefore, the manipulator can not dexterously be operated to accomplish the desired mission. i.e, if the manipulator tracks the desired mission trajectory, the disturbance to the base can not be minimized. Hence, it is very difficult to minimize the disturbance or ZRM for desired capture mission. Fortunately, an obvious characteristic of the space robot with respect to ground-base robot is the dynamics coupling between the robot and it's base. Therefore, the dynamics coupling provides some potential methods for researchers and engineers. Using the dynamics coupling, we will address a novel methodology to compensate the disturbance other than the attitude control system (ACS) in this chapter.

In general, the dynamics coupling may be a disadvantage for space robot system, many previous research work focus on how to eliminate it. On the other hand, the dynamics coupling may be a advantage if we use it correctly. Using the nonholonomic path planning method to control robot motion, the desired attitude of the base can be maintained as proposed by Fernandes, Gurvits, and Li (C. Fernandes, et, al, 1992) and Nakamura and Mukherjee (Robert E Roberson et, al 1988), and the methods will be best implemented to a system with a strong dynamics coupling. Therefore, it is necessary to fully understand the dynamics coupling, and try to eliminate it completely, rather than to minimize the coupling effect at the beginning. The measurement of dynamics coupling was firstly addressed by Xu (Yangsheng Xu et, al, 1993).

In this chapter, we discuss the problem of dynamic balance control of a space robot when space manipulator follows the specified path to capture the object, rather than use ACS to compensate dynamics coupling. Therefore, we proposed to use a balance arm to compensate the dynamics coupling due to mission arm's motion, thus, our idea changes the disadvantage of dynamics coupling as advantaged factor. Accordingly, this chapter is organized as follows. We formulate the dynamics equations of multi-arm free-floating space robot, based on linear and angular momentum conservation law and Lagrangian dynamics in Section II. In section III, we analyze and measure the dynamics coupling between the base and its multi-arm manipulators. Then, we address dynamic balance control algorithm of the base during the motion of manipulators in Section IV. In Section V, the computer simulation study and result are shown. Final section summarizes the whole chapter and draws the conclusion.

2. Multi-Arm Space Robot System

2.1 Modeling of Multi-arm Free-Floating Space Robot

In this section, we describe the model of multi-arm space robot. These arms are installed on a base (spacecraft or satellite), one of these arms is called Mission Arm which is used to accomplish the space mission, such as, capturing and repairing, the others are the balance arms which are used to balance the reaction motion due to the motion of the mission arm. Motion planning and control of the balance arms are our key problems which will be introduced in the following sections. Here, the space robot system is in free-floating situation during operation in order to avoid the serious collisions and save the fuel. Therefore, no external forces or momentum are exerted on the space robot system. The linear and angular momentum is conserved in this situation.

The authors assume a model of multi-arm space robot system which is composed of a base and multiple manipulator arms mounted on the base. Fig. 1 shows a simple model of the space robot system with multi-arms, which is regarded as a free-flying serial $nm+1$ link system connected with nm degrees of freedom (DOF) active joints. Here, in order to clarify the point at issue, we make the following assumptions: (a) The each installed manipulator consists of n links, and each joint has one rotational degree of freedom and is rate controlled. The whole system is composed of rigid bodies. Moreover, there are no mechanical restrictions and no external forces and torques for simplicity, so that linear and angular momentum is conservative, and equilibrium of forces and moments, strictly hold true during the operation; (b) the kinematics and dynamics analysis during the motion is in the inertial coordinate system; (c) the DOF of space robot system in inertial coordinate system is $nm+1$. The attitude of satellite has three DOFs, and the translation of the satellite has three DOFs. Here, n represents the number of robot arm and m represents the DOF number of each robot arm.

As shown in Fig. 1, the dynamics model of space robot can be treated as a set of $nm+1$ rigid bodies connected with nm joints that form a tree configuration, each manipulator joint numbers in series of 1 to m . We define two coordinate systems. One is the inertial coordinate system Σ_I in the orbit, the other is the base coordinate system Σ_B attached on the base body with its origin at the centroid of the base. The COM is the center of total system mass. We use three appropriate parameters such as Roll, Pitch, and Yaw to describe the attitude of the base.

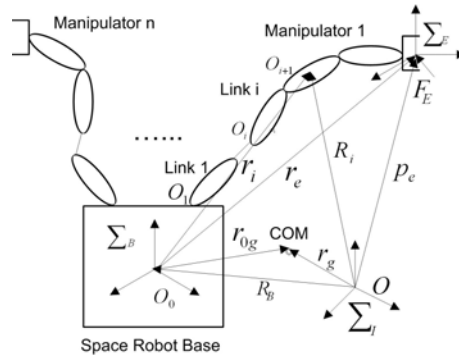


Fig. 1. Dynamics Model of Space Robot System.

2.2 Equation of Motion

In this section, the equation of motion of a multiple-arm free-floating space robot system are obtained according to proposed dynamics model. The dynamical influence due to orbital mechanics are neglected because of relative short length and duration of the travel of system. It is a general problem to derive the dynamics equations of space robot system. We use Roberson-Wittenburg method [Robert E Roberson et, al 1988] and previous work [E. Papadopoulos, et, al 1990] to derive the rigid dynamics of multi-body system. This method utilizes the mathematical graph theory to describe the interconnecting of the multi-body. The advantage of this method is that the various multi-body systems can be described by the uniform mathematical model. Thus, we will simplify describe the derivation process of dynamics equation according to the assumed model. The total kinetic energy of space robot system with respect to inertial coordinate Σ_I can be expressed as follows.

$$T = T_0 + T_1 \tag{1}$$

with

$$T_0 = \frac{1}{2} M v_{CM}^2 \tag{2}$$

$$T_1 = \frac{1}{2} \left\{ m_0 \dot{R}_B^2 + \Omega_0 I_0 \Omega_0 \right\} + \frac{1}{2} \left\{ \sum_{i=1}^n \sum_{j=1}^k \left(m_{(i,j)} \dot{r}_{(i,j)}^2 + \omega_{(i,j)} I_{(i,j)} \omega_{(i,j)} \right) \right\} \tag{3}$$

where $I_{(i,j)}$ is the inertial matrix of j -th body of i -th manipulator arm with respect to system COM. Therefore, the kinetic energy of whole system can be rewritten as.

$$T = \frac{1}{2} v^T H(x_0, \theta) v \tag{4}$$

where $v = (\dot{X}_0^T, \dot{\theta}^T)$ is the vector of generalized velocities, and $X_0 = (X_0^T, \psi^T)$ is the vector to represent the position and orientation of the base, and matrix $H(x_0, \theta)$ is an positive definite mass matrix, and $\theta = (\theta_1^1, \dots, \theta_k^1, \dots, \theta_1^n, \dots, \theta_k^n)^T$.

From the kinetic energy formulation, we can derive dynamics equation by Lagrangian dynamics when there are not external forces or momenta exerted on the space robot system.

$$H^* \ddot{\phi} + C^*_{(\phi, \dot{\phi})} = \tau \quad (5)$$

where H^* is a generalized inertial matrix and C^* is a centrifugal and coriolis term.

$$H^* = \begin{bmatrix} H_0 & H_{0m} \\ H_{0m}^T & H_m \end{bmatrix} \quad (6)$$

$$C^* = \dot{H}^* \dot{\phi} - \frac{\partial}{\partial \phi} \left(\frac{1}{2} \dot{\phi}^T H^* \dot{\phi} \right) \quad (7)$$

$$\phi = \begin{bmatrix} X_0^T, \theta^T \end{bmatrix}^T \quad (8)$$

The symbols in the above equations and Fig. 1 are defined as follows:

$m_{(i,j)}$: mass of link j of the i -th manipulator arm

$r_{(i,j)}$: position vector of centroid of link j of the i -th manipulator arm in Σ_I system

$R_{(i,j)}$: position vector of joint j of i -th manipulator arm in Σ_B system

$p_{(i,e)}$: position vector of end-effector of i -th manipulator arm in coordinate system origin in Σ_B system

$R_{(i,e)}$: position vector of end-effector of i -th manipulator arm in coordinate system origin in Σ_B system

R_B : position vector of centroid of the base body in Σ_I system

r_g : position vector of a total centroid of the space robot system in Σ_I system

$I_{(i,j)}$: inertia tensor of link j of i -th manipulator with respect to its mass center

τ : joint torque of the whole manipulator arms

ϕ : joint variables and base variables

x_0 : position/orientation of the base

H_0 : the inertial matrix of the base

H_m : the inertial matrix for the manipulator arms

H_{0m} : coupling inertial matrix between the base and robot manipulator

All vectors are described with respect to the inertial coordinate system Σ_I and body coordinate system Σ_B . In Equation (5), C^* can be obtained by inverse dynamics computation.

3. Dynamics Coupling

The dynamics coupling may not always be a disadvantage for the space robot system, as it can be used to balance the attitude of the base sometimes. In this chapter, we will introduce the balance concept to compensate the attitude disturbance using dynamics coupling. This section addresses the characteristics and measure method of dynamics coupling.

The dynamics coupling is significant in understanding the relationship between the robot joint motion and the resultant base motion, and it is useful in minimizing fuel consumption for base attitude control. The measure of dynamics coupling was proposed by Xu (Yangsheng Xu, 1993). Here, we will simply derive the mapping relationship between manipulator motion and the base motion for multi-arm space robot system.

Let $V_{(i,j)}$ and $\Omega_{(i,j)}$ be linear and angular velocities of the j -th body of the i -th manipulator arm with respect to, Σ_I and let $v_{(i,j)}$ and $\omega_{(i,j)}$ be that with respect to Σ_B . Thus, we can obtain.

$$\begin{cases} V_{(i,j)} = v_{(i,j)} + V_0 + \Omega_0 \times r_{(i,j)} \\ \Omega_{(i,j)} = \omega_{(i,j)} + \Omega_0 \end{cases} \quad (9)$$

where V_0 and Ω_0 are linear and angular velocities of the centroid of the base with respect to Σ_I . The operator \times represents the outer product of R^3 vector. the velocities $v_{(i,j)}$ and $\omega_{(i,j)}$ in the base coordinate Σ_B can be calculated by following equation.

$$\begin{bmatrix} v_{(i,j)} \\ \omega_{(i,j)} \end{bmatrix} = J_{(i,j)}(\theta) \dot{\theta} \quad (10)$$

$$J_{(i,j)} = \begin{bmatrix} J_{T(i,j)} \\ J_{R(i,j)} \end{bmatrix} \quad (11)$$

where $J_{(i,j)}(\theta)$ is the jacobian of the j -th body of the i -th manipulator arm.

Therefore, the total linear and angular momentum of the space robot system P, L is expressed as follows.

$$P = m_0 V_0 + \sum_{i=1}^n \sum_{j=1}^k (m_{(i,j)} v_{(i,j)}) \quad (12)$$

$$L = I_0 \Omega_0 + m_0 R_0 \times V_0 + \sum_{i=1}^n \sum_{j=1}^k (I_{(i,j)} \omega_{(i,j)} + m_{(i,j)} r_{(i,j)} \times v_{(i,j)}) \quad (13)$$

These equations are rewritten with the variables v_0, ω_0 and $\dot{\theta}$.

$$\begin{bmatrix} P \\ L \end{bmatrix} = H_0 \begin{bmatrix} V_0 \\ \Omega_0 \end{bmatrix} + H_m \dot{\theta} \quad (14)$$

where

$$H_0 = \begin{bmatrix} \omega E & -\omega [r_{0g} \times] \\ \omega [r_g \times] & I_\omega \end{bmatrix} \quad (15)$$

$$H_m = \sum_{i=1}^n \sum_{j=1}^k \left(J_{R(i,j)}^T J_{(i,j)} J_{R(i,j)} + m_{(i,j)} J_{T(i,j)}^T J_{T(i,j)} \right) \tag{16}$$

$$J_{R(i,j)} = [0, \dots, 0, d_{(1,j)}, d_{(2,j)}, \dots, d_{(i,j)}, 0, \dots, 0] \tag{17}$$

$$J_{T(i,j)} = [0, \dots, 0, d_{(i,j)} \times (r_{(i,j)} - d_{(i,j)}), 0, \dots, 0] \tag{18}$$

$J_{R(i,j)}$ is Jacobian matrix of j -th joint of i -th manipulator and map the angular velocities of joint and angular velocity of j -th link. As such, the $J_{T(i,j)}$ maps the linear velocity. E is unit vector indicating a rotational axis of joint j of manipulator i . $r_{(i,j)}$ is position vector of the mass center of link j of manipulator i , $d_{(i,j)}$ is position vector of joint j of manipulator i .

In the free-floating situation, no external forces or momenta exerted on the whole space robot system, and we ignore the gravitational force. Therefore, the linear and angular momenta of the system are conserved. we assume that the initial state of system is stationary, so that the total linear and angular momenta are zero. Hence, Equation (14) can be rewritten as follows.

$$\begin{bmatrix} V_0 \\ \Omega_0 \end{bmatrix} = -H_m^{-1} H_B \dot{\theta} \tag{19}$$

Equation (19) describes the mapping relationship between the manipulator joint motion and the base motion. Because the velocities of end-effector in base coordinate is related to the joint velocities, we can obtain.

$$\begin{bmatrix} v_{(i,e)} \\ \omega_{(i,e)} \end{bmatrix} = J_{(i,j)} \dot{\theta} \tag{20}$$

However, the velocity of end-effector in inertial coordinate Σ_i can be represented as follows.

$$\begin{cases} V_{(i,j)} = v_{(i,j)} + V_0 + \Omega_0 \times r_{(i,e)} \\ \Omega_{(i,e)} = \omega_{(i,e)} + \Omega_0 \end{cases} \tag{21}$$

Combining Equation (19), (20), and (21), the relationship between the velocities of end-effector and the base velocities in inertial coordinate can be obtained as follows.

$$\begin{bmatrix} V_{(i,j)} \\ \Omega_{(i,j)} \end{bmatrix} = \left(J_{(i,j)} - KH_m^{-1} H_0 \right) \begin{bmatrix} V_0 \\ \Omega_0 \end{bmatrix} \tag{22}$$

where

$$K = \begin{bmatrix} E & [R_{(i,e)} \times] \\ 0_{3 \times 3} & E \end{bmatrix} \tag{23}$$

In Equation (22), let $M = J_{(i,j)} - KH_m^{-1} H_B$, and the inverse relation of Equation (22) is

$$\begin{bmatrix} V_0 \\ \Omega_0 \end{bmatrix} = N \begin{bmatrix} V_e \\ \Omega_e \end{bmatrix} \quad (24)$$

The matrix M and N describe how robot motion alters the base motion, and these two matrices represent the dynamics interaction between the robot manipulator and the base. They are known dynamics coupling factor (Yangsheng Xu, 1993). Equation (24) defines the interactive effect between the end-effector's motion of manipulator and the base motion. The dynamics coupling factor defined above basically represents the coupling of motion. Similarly, we also can define the coupling factor for force transmission from the end-effector to the base, thus we can easily obtain the force relationship as follows.

$$F_B = N^{-T} F_e \quad (25)$$

During the capture operation of space manipulator, the impact between the end-effector and the target is not avoided, so that, Equation (25) can measure the disturbance force to the base due to the collision. On the other hand, these mapping relationship can be used to plan carefully the robot manipulator motion in order to minimize the disturbance to the base.

In fact, the dynamics coupling of space robot system is very important to understand the dynamics characteristics and design the control part of the system. Especially, in the free-floating situation, this coupling must be considered in order to realize the minimum disturbance. In the next section, we will design the balance control algorithm to compensate the disturbance using dynamics coupling factor mentioned above.

4. Dynamic Balance Control

4.1 Dynamic Balance Control Concept

In this section, we address a balance control strategy for multi-arm space robot system. Here, we assume that the space robot system has a two-arm robot for simplicity, The number of DOF of each arm is same or not. We define these two arms as the mission arm and the balance arm, respectively. The mission arm is used to accomplish desired mission and the balance arm is used to compensate the attitude of the base using the dynamics coupling concept.

In order to balance the attitude disturbance of the base well, the authors utilize the coordinated control concept (Yangsheng Xu, et, al 1994) to address the dynamic balance control method proposed by them. However, according to our research problems, we can not use the attitude control system to compensate the robot arm's reaction so that we use the balance robot arm to compensate the disturbance. Therefore, we address our balance control concept as follows.

- (a) For two-arm space robot system, since the DOF of the whole system becomes so large that it is difficult to handle computation and commands using the state-of-the-art onboard computer. Hence, we suggest that each robot arm's controllers are independent.
- (b) Because the motion trajectory of the mission arm has been planned for the desired operation, the reaction momenta to the base can be predicted using the dynamics coupling factors in advance.
- (c) We build the mapping relationship of the mission arm's motion and balance arm's motion in the zero attitude disturbance condition. Thus, the trajectory of the balance arm will be defined by the trajectory of the mission arm.

The balance control concept proposed by us uses the motion of the balance arm to compensate the attitude disturbance due to the motion of the mission arm. we will address the balance control algorithm in detail in the following subsection.

4.2 Coordinated Control of Two Arms

Coordinated control of space robot was addressed by Oda, M., (M. Oda, 1996), he presented the coordinated control concept between the spacecraft and its manipulator, Here, we use this concept to our problem. we only consider the attitude disturbance of the base for free-floating space robot system. Hence, the angular momenta of the whole system can be estimated by Equation (13). At the beginning of the mission ram motion, the whole system keeps stable so that the initial momenta are zeros. Therefore, during the capture operation of the mission arm, we can get the relationship between the joint velocities of mission arm and the attitude angular velocities of the base from Equation (14) as follows.

$$\Omega_0 = J_{(M,\omega)} \dot{\theta}_M \quad (26)$$

Differentiate Equation (26) with respect to time, we can obtain.

$$\dot{\Omega}_0 = \dot{J}_{(M,\omega)} \dot{\theta}_M + J_{(i,j)} \ddot{\theta}_M \quad (27)$$

where

$$J_{(M,\omega)} = -\tilde{H}_{(M,m)}^{-1} \tilde{H}_B \quad (28)$$

$$\tilde{H}_B = I_{(M,\omega)} + W \tilde{r}_g \tilde{r}_{0g} \quad (29)$$

$$\tilde{H}_{(M,m)} = I_{(M,\theta)} - \tilde{r}_g J_{T\omega} \quad (30)$$

However, the angular momentum given by Equation (26) can not be integrated to obtain the base orientation ψ as a function of the system's configuration, θ_M because of the nonholonomic characteristic, i.e we can not obtain the analytical solution to depict the relationship between the attitude ψ and joint angle θ_M . However, Equation (26) can be integrated numerically, thus, the orientation of the base will be a function of the trajectory of manipulator in joint space, i.e. different trajectory in joint space, with the same initial and final points, will generate different orientation of the base. The non-integrability property is known nonholonomic characteristics of free-floating space robot (E. Papadopoulos, 1992).

For the given capture operation, the mission arm motions along the given trajectory. According to the trajectory planning method and dynamics equations, we can get the joint angle, angular velocities, and angular acceleration of the mission arm in joint space. Therefore, we can obtain the angular velocities, and acceleration of the base using Equations (26), (27) as mentioned above. On the other hand, we also can numerically integrate Equation (26) to obtain the orientation function of the base with respect to the joint variable of the mission arm. Therefore, we can obtain the torque exerted on the base because of the motion of the balance arm. Generally speaking, the attitude control system drives the reaction wheels to counteract this torque in order to balance the attitude of the base. our concept is to utilize the balance arm to substitute

for the reaction wheels. an important advantage of this method is to save the fuel that is limit and valuable in space.

Hence, we use the motion parameters of the base due to the mission arm's motion to calculate the joint angle, joint angular velocities and joint acceleration of the balance arm. These parameters of the balance arm consist of the balance arm's trajectory in joint space. To realize the dynamic balance of the base's attitude, the attitude changes of base due to balance arm's motion φ should satisfy $\psi + \varphi = 0$, so that the attitude disturbance of the base almost be zero. Thus, We can obtain the following two equations to represent the relationship between the balance arm and base's attitude.

$$\dot{\theta}_B = J_{(B,\omega)}^{-1} \Omega_0 \quad (31)$$

$$\ddot{\theta}_B = \dot{\Omega}_0 - \dot{J}_{(B,\omega)} \dot{\theta}_B \quad (32)$$

where θ_B is the joint variables of balance arm, and $J_{(B,\omega)}$ is the Jacobian matrix of balance arm.

For numerical simulation, Equation (31) can be integrated numerically to obtain the joint angle trajectory of the balance arm. Thus, we can get the desired trajectory of the balance arm in joint space, the balance arm's motioning along this desired trajectory can dynamically balance the attitude of the base. Thereby, our balance control concept can be realized. The effectiveness of balance control algorithm can be demonstrated in the simulation study of the following section.

5. Simulation Study

To better understand and examine the practical balance control performance of the proposed method, we define a two-arm space robot system as an illustrative example to attest the balance control method. In simulation, we assume that the object is in the workspace of the mission arm for simplicity. We have carried out relatively precise numerical simulation with a realistic 3D model.

The model comprises a two-arm manipulator which is called mission arm and balance arm, respectively. Each arm has 3-DOF, and every joint is revolution joint, Moreover, the geometric structure of two-arm manipulators is same in order to simplify the computation. Here, we assume that each link of manipulator is cylindric configuration. The radius of link $r = 0.04m$, and the base of space robot system is cubic configuration. Table I shows the dynamics parameters of the two-arm manipulator space robot system.

In simulation, we firstly plan the mission arm trajectory using Point to Point algorithm (PTP) so that the mission arm can approach and capture the target. However, the orientation of end-effector of the mission arm will be effected because the dynamics coupling in free-floating situation so that the collision between the end-effector and target becomes very serious. Therefore, the dynamic balance control concept can compensate this disturbance using the disturbance of motion of the balance manipulator. From the academic point of view, this method is very useful, the simulation result can verify our balance control algorithm. The balance control concept can be divided into two phases,

Phase I mainly computes dynamics coupling and base motion trajectory because of disturbance of master manipulator motion in free-floating situation. Phase II calculates the required joint trajectory of the balance arm according to the estimation of Phase I. We will address these two phases in the following parts in detail.

	Space Base (Link 0)	Space Manipulators					
		Mission Arm			Balance Arm		
		Link1	Link2	Link3	Link1	Link2	Link3
Mass(Kg)	300	5.0	5.0	5.5	5.0	5.0	5.5
Length(m)	1.0	0.5	0.5	0.5	0.5	0.5	0.5
I_{xx} ($Kg \cdot m^2$)	50	0.4187	0.004	0.0044	0.4187	0.004	0.0044
I_{yy} ($Kg \cdot m^2$)	50	0.4187	0.1062	0.1168	0.4187	0.1062	0.1168
I_{zz} ($Kg \cdot m^2$)	50	0.16	0.4187	0.4606	0.16	0.4187	0.4606

Table 1. Parameters of Space Robot System.

Phase I: According to the planned joint trajectory of missionmanipulator, we design the PD feedback controller to drive the joint. We use the inverse dynamics to calculate the dynamics coupling due to the motion of mission manipulator, at the same time, we also can obtain the changes of orientation, angular velocities, and angular accelerative velocities of the base because of motion of the mission arm. Here, we use the precise numerical simulation so that we can integrate numerically Equation (26) to obtain the mapping relationship between the base orientation and the mission manipulator's configuration.

Phase II: We calculate the desired trajectory of the balance arm according to the motion trajectory of the base so that the disturbance of the balance arm's motion can compensate the disturbance of the mission arm's motion, i.e. combining the negative influence due to the mission arm's motion with the positive influence due to the balance arm's motion equals to zeros, Hence, the balance control method is realized.

For the simulation result, Fig. 2 and Fig. 3 depict the attitude disturbance of the base because of the motion of the mission manipulator and that of the balance arm respectively. Fig. 4 shows the reaction resultant torque to the base after using balance control algorithm. Fig. 5 depicts the attitude disturbance after using the balance control algorithm. Note that the attitude disturbance of the base becomes very small at the end of the capture operation, as shown in Fig. 5.

The goal of simulation is to verify that dynamic balance control method proposed is right and useful. The authors also measure the dynamics coupling between the mission arm and the base in order to confirm whether the balance arm can balance this coupling and compensate the orientation disturbance of the base.

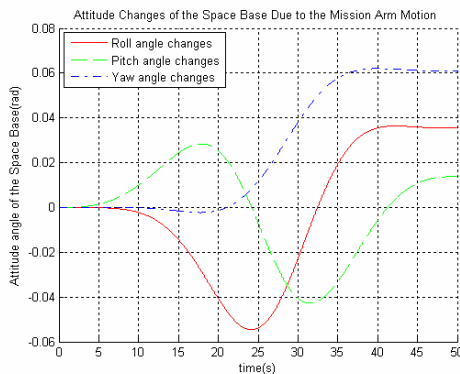


Fig. 2. Attitude changes of the base due to the mission arm motion.

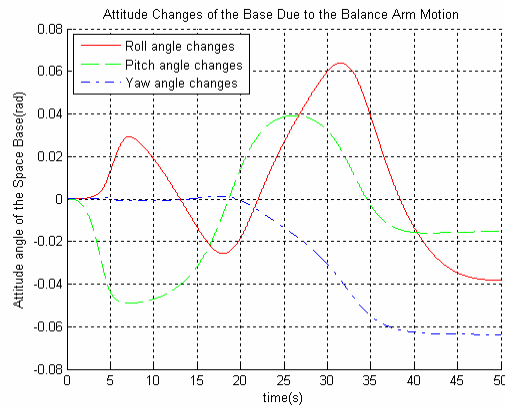


Fig. 3. Attitude changes of the base due to balance arm motion.

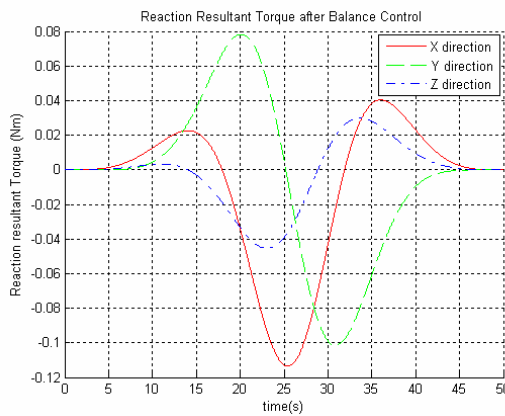


Fig. 4. Reaction resultant torque after balance control.

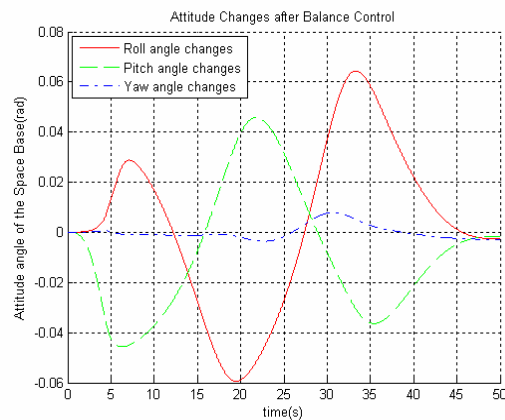


Fig. 5. Attitude changes after balance control.

6. Conclusion

In this chapter, we studied the dynamic balance control of multi-arm free-floating space robot. According to unique characteristics of free-floating space robot, we presented the dynamics coupling representing the robot arm and base motion and force dependency. Based on the dynamics coupling and measurement method, we proposed the concept of dynamic balance control, the use of the proposed concept is of significance in planing the balance arm's motion for compensate the attitude disturbance of space base.

Based on the dynamic balance control concept, we proposed the coordinated control algorithm for the mission arm and the balance arm. During the operation of mission arm, the balance arm can easily compensate the disturbance due to motion of the mission arm. The performance of the coordinated control algorithm is verified by the simulation studies. The simulation results showed that the proposed dynamic balance control method could be used practically.

7. References

- D. Zimpfer and P. Spehar (1996). STS-71 Shuttle/Mir GNC Mission Overview, *Advances in the Astronautical Sciences, Vol.93, American Astronautical Society*, pp.441-460, San Diego, CA
- I. Kawano, et al. (1998). First Result of Autonomous Rendezvous Docking Technology Experiment on NASDA's ETS-VII Satellite, *IAF-98-A.3.09, 49th Internatioanl Astronautical Congress*
- M. Oda (1999). Space Robot Experiments on NASDA's ETS-VII Satellite-Preliminary Overview of the Experiment Result, *Proceedings of IEEE International Conference on Robotics and Automation*
- M. Oda (2000). Experience and Lessons Learned from the ETS-VII Robot Satellite, *Proceedings of IEEE International Conference on Robotics and Automation*
- Noriyasu Inaba, Mitsushige Oda (2000). Autonomous Satellite Capture by a Space Robot, *Proceedings of IEEE International Conference on Robotics and Automation 2000*.
- Steven Dubowsky, Miguel A. Torres (1991). Path Planning for Space Manipulator to Minimize Spacecraft Attitude Disturbance, *Proceedings of IEEE International Conference on Robotics and Automation*
- E. Papadopoulos (1991). Path Planning for Space Manipulators Exhibiting Nonholonomic Behavior, *Proceedings of IEEE International Conference Intelligent Robots and Systems*
- K.yoshida and K. Hashizume (2001). Zero Reaction Maneuver: Flight Velification with ETS-VII Space Robot and Extention to Kinematically Redundant Arm, *Proceedings of IEEE International Conference on Robotics and Automation*
- C. Fernandes, L. Gurvits, and Z.X. Li (1992). Attitude Control of Space Platform/ Manipulator System Using Internal Motion, *Proceedings of IEEE International Conference on Robotics and Automation*
- Y. Nakamura and R. Mukherjee (1990). Nonholonomic Path Planning of Space Robots via Bi-directional Approach, *Proceedings of IEEE International Conference on Robotics and Automation*
- Robert E. Roberson, Richard Schwertassek: (1998) *Dynamics of Multibody Systems*, Berlin: Springer-verlag
- E. Papadopoulos, S. Dubowsky (1990). On the Nature of Control Algorithm for Space Manipulators, *Proceddings of IEEE International on Robotics and Automation*

- Yangsheng Xu (1993). The Measure of Dynamics Coupling of Space Robot System, *Proceedings of the IEEE International Conference on Robotics and Automation*
- Yangsheng Xu and Heung-yeung Shum (1994). Dynamic Control and Coupling of a Free-Flying Space Robot System, *Journal of Robotic Systems* Vol.11, No.7, pp.573-589
- M. Oda, (1996). Coordinated Control of Spacecraft Attitude and its Manipulator, *Proceedings of IEEE International Conference on Robotics and Automation*



Mobile Robots: towards New Applications

Edited by Aleksandar Lazinica

ISBN 978-3-86611-314-5

Hard cover, 600 pages

Publisher I-Tech Education and Publishing

Published online 01, December, 2006

Published in print edition December, 2006

The range of potential applications for mobile robots is enormous. It includes agricultural robotics applications, routine material transport in factories, warehouses, office buildings and hospitals, indoor and outdoor security patrols, inventory verification, hazardous material handling, hazardous site cleanup, underwater applications, and numerous military applications. This book is the result of inspirations and contributions from many researchers worldwide. It presents a collection of wide range research results of robotics scientific community. Various aspects of current research in new robotics research areas and disciplines are explored and discussed. It is divided in three main parts covering different research areas: Humanoid Robots, Human-Robot Interaction, and Special Applications. We hope that you will find a lot of useful information in this book, which will help you in performing your research or fire your interests to start performing research in some of the cutting edge research fields mentioned in the book.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Panfeng Huang and Yangsheng Xu (2006). Attitude Compensation of Space Robots for Capturing Operation, Mobile Robots: towards New Applications, Aleksandar Lazinica (Ed.), ISBN: 978-3-86611-314-5, InTech, Available from:

http://www.intechopen.com/books/mobile_robots_towards_new_applications/attitude_compensation_of_space_robots_for_capturing_operation

INTECH

open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2006 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](#), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.